


## 2 Locate the device on the network

### Device Discovery tool

The Device Discovery tool can be found at <http://www.barco.com/networktools>

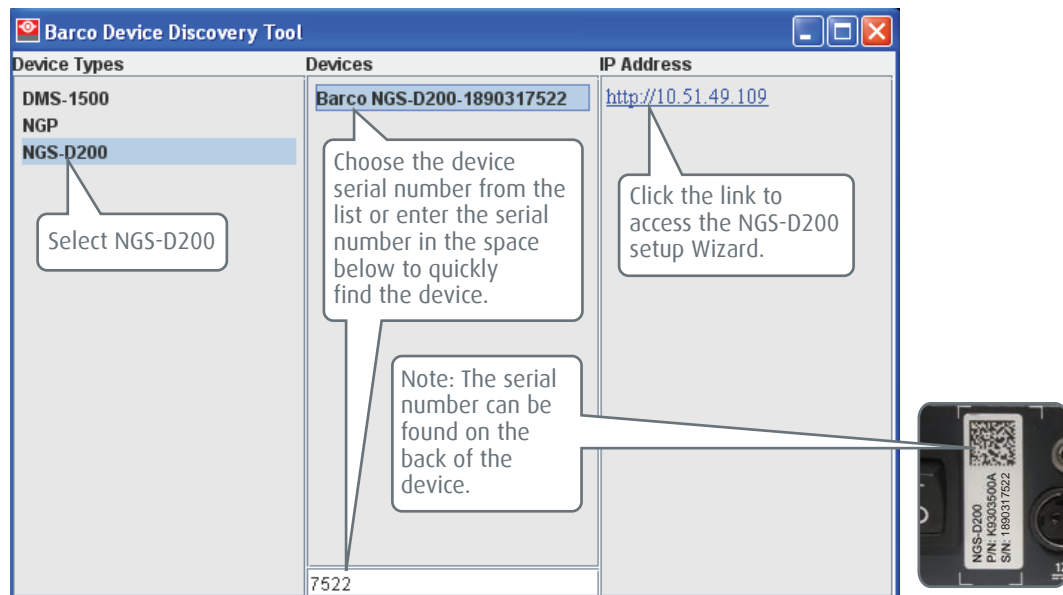

# NGS-D200

## Quick Start Guide



### What's in the box?



The following equipment is shipped with the NGS-D200 unit:

1. NGS-D200
2. Power cord for Europe
3. Power cord for USA
4. 12 V DC power supply
5. SD card

## 3 Setup Wizard

### What you'll need

1. Default user name and password (password can be changed using wizard):
  - a. user name = admin (default)
  - b. password = \_\_\_\_\_(The password must contain at least 8 characters, 1 uppercase letter, a number and no special characters)
2. Choice of device type "Encoder/Decoder"
3. Management Server IP address/DNS name (if in managed mode)
4. NTP Server IP/DNS name
5. If not using DHCP:
  - a. IP address/DNS name
  - b. Gateway IP address/DNS name
  - c. Subnet mask

**NOTE:** If any accessories are missing or damaged, contact Customer Support for an immediate replacement. Do not place any weight on top of the unit. It is not designed to support weight and internal components can be damaged if objects are placed on top of it.

BARCO

visibly yours


# 1 Connecting your device

## Installation diagram

1. Power adapter
2. Primary LAN (RJ45)
3. Redundant LAN (RJ45)
4. Audio IN (3.5mm stereo)
5. Audio OUT (3.5mm stereo)
6. DVI-I IN (DVI-D to DVI-D or VGA to DVI-A)
7. Host USB (Type A to Type B)
8. 3D stereo cable (see user manual for more details)
9. DVI-D OUT

10\*, 11\*, 12, 13  
Four USB Slots for  
Keyboard and Mouse

14. Mic IN
15. Headphone OUT
16. SD Card

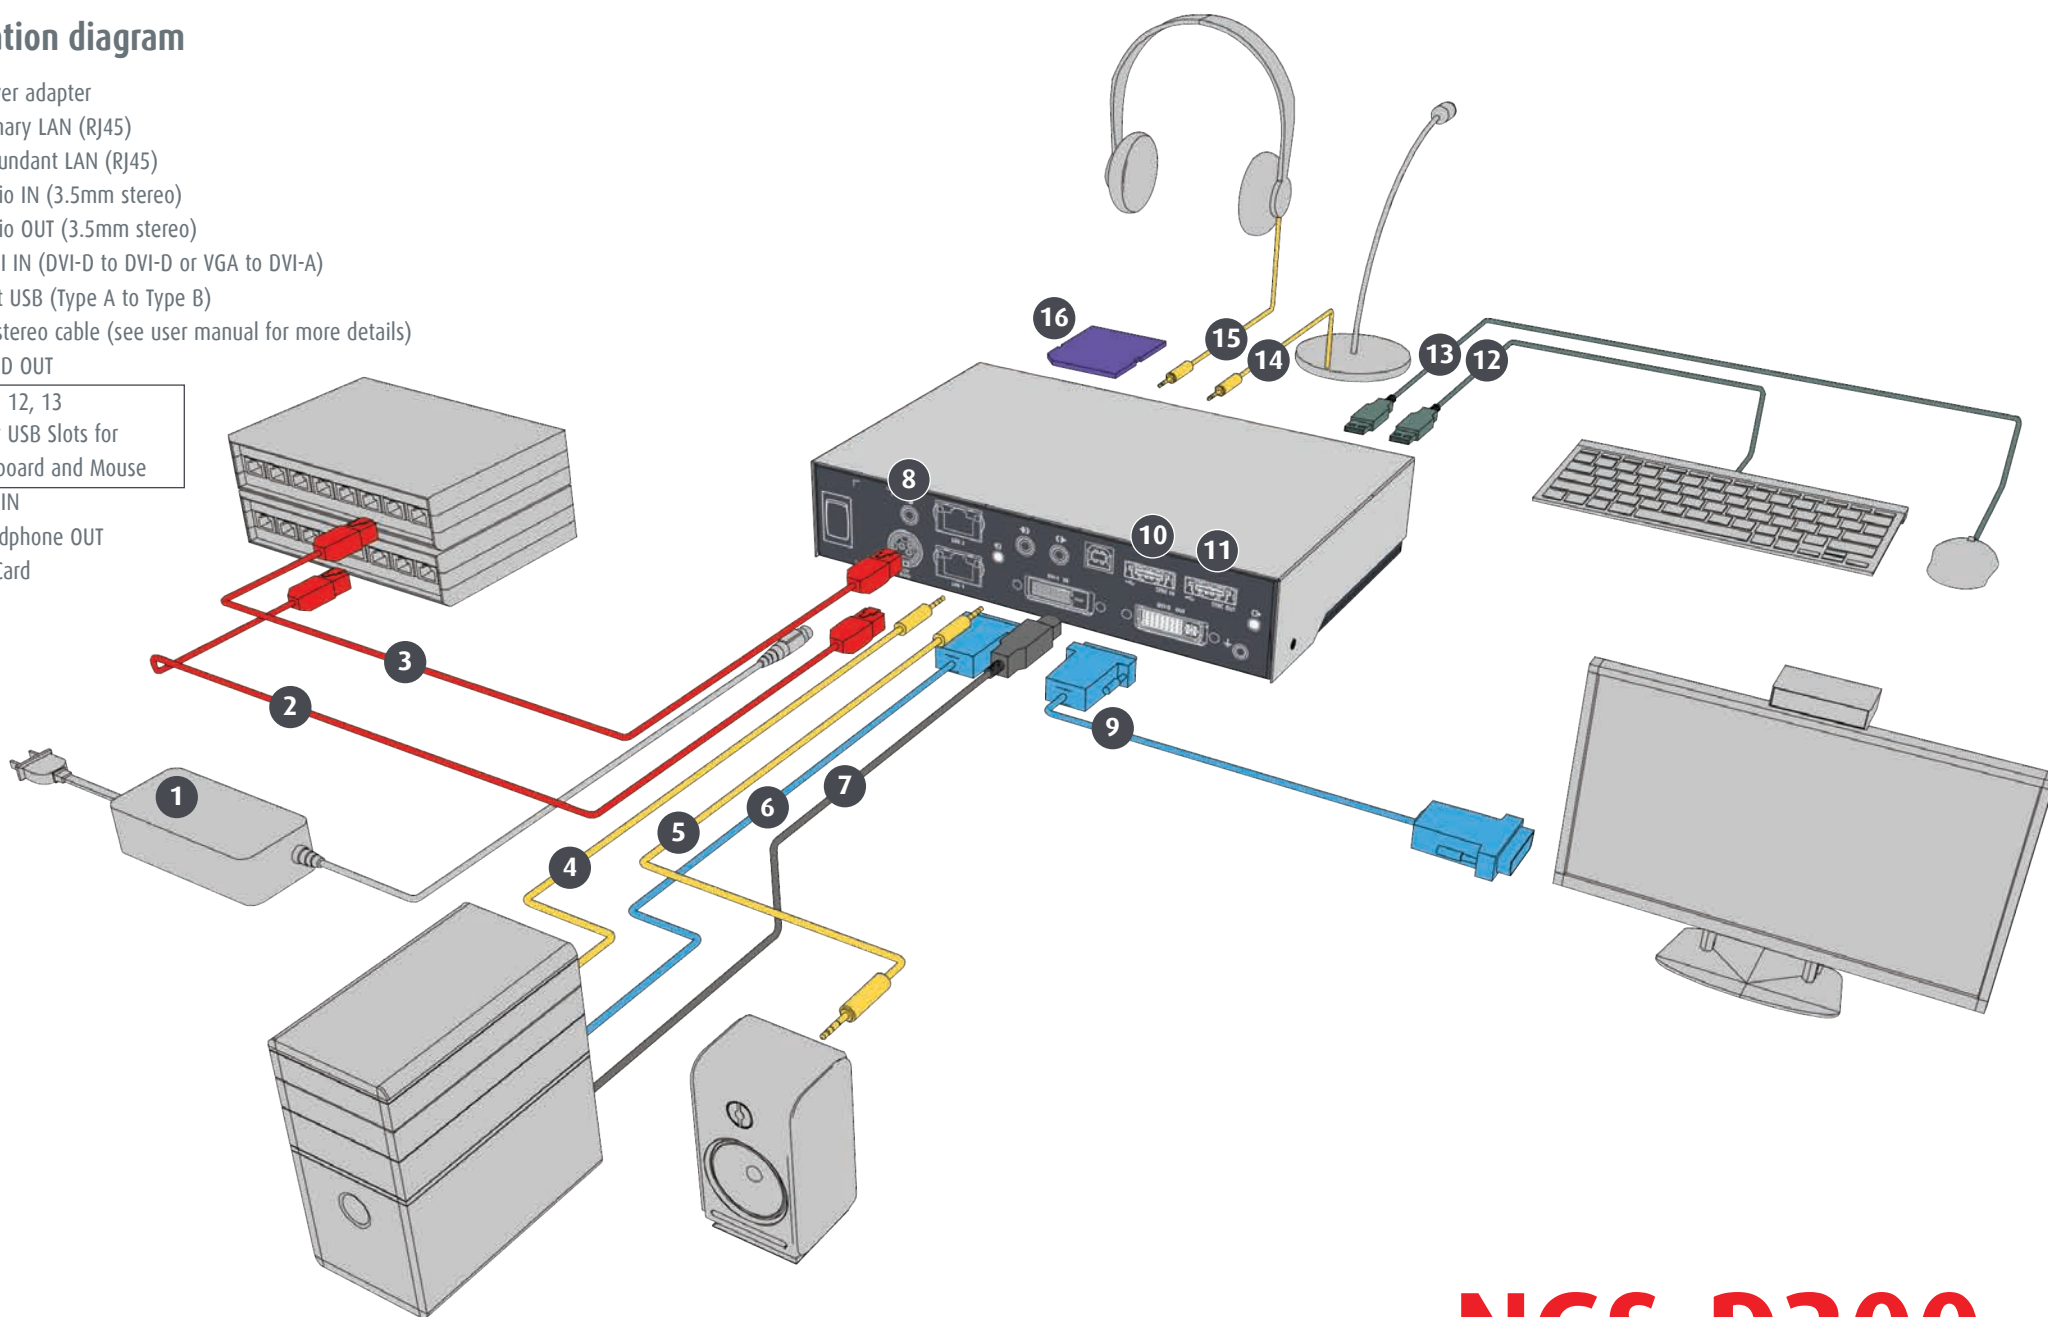

\* Dual purpose USB/Sync connectors (see user manuals for more details).

# NGS-D200